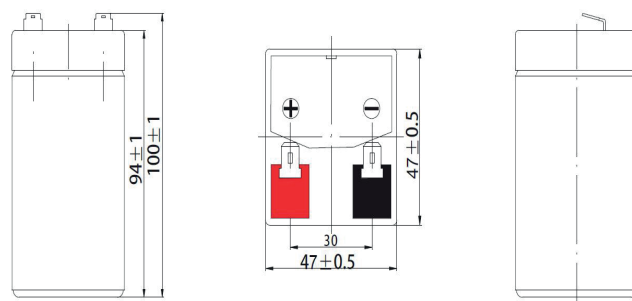



SPECIFICATIONS

Nominal Voltage		4 V
Rated Capacity (20 hour rate)		4.0 Ah
Rated Capacity	20 hour rate(1.80V/cell,25°C/77°F)	4.0Ah/0.225A
	10 hour rate(1.80V/cell,25°C/77°F)	3.8Ah/0.428A
	5 hour rate (1.75V/cell,25°C/77°F)	3.20Ah/0.72A
	3 hour rate (1.75V/cell,25°C/77°F)	3.06Ah/1.02A
	1 hour rate (1.60V/cell,25°C/77°F)	2.6Ah/2.93A
Max. discharge current		60A(5 Sec.)
Internal Resistance		Full charged at 25°C : Approx 37mΩ
Capacity affected by Temperature	40°C (104°F)	102%
	25°C (77°F)	100%
	0°C (32°F)	85%
Self-Discharge ORBUS GP series batterys may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.		
Charge (Constant Voltage) 25°C (77°F)	Cycle Use	Initial Charging Current Less than 1.2A Voltage 4.86-5.0V
	Float Use	Voltage 13.5-13.8V

MECHANICAL SPECIFICATIONS

Dimension (L x W x H)	47 x 47 x 101 mm
Weight	0.44 Kg
Terminal Type	T1
Case Material	ABS
Chemistry	Pb

DIMENSIONAL SPECIFICATIONS

Constant Current Discharge (Amperes) at 25°C (77°F)

FV/Time	5min	10min	15min	20min	30min	45min	1hr	2hr	3hr	4hr	5hr	6hr	8hr	10hr	20hr
1.85 V	7.62	5.85	4.85	4.19	3.24	2.39	2.01	1.19	0.93	0.76	0.62	0.54	0.432	0.361	0.198
1.80 V	10.2	7.47	5.85	4.95	3.82	2.78	2.25	1.30	1.00	0.81	0.66	0.57	0.458	0.372	0.200
1.75 V	11.5	8.21	6.39	5.33	3.97	2.88	2.36	1.35	1.02	0.83	0.68	0.59	0.466	0.382	0.202
1.70 V	12.7	8.95	6.83	5.6	4.13	3.00	2.43	1.38	1.05	0.85	0.70	0.60	0.473	0.39	0.206
1.65 V	14.0	9.66	7.26	5.95	4.36	3.07	2.49	1.40	1.09	0.88	0.72	0.62	0.480	0.398	0.208
1.60 V	15.4	10.5	7.76	6.34	4.60	3.20	2.51	1.46	1.13	0.90	0.74	0.63	0.485	0.402	0.210


Disclaimer: Manufacturers have the right to self-modify the parameters of the product updates, please keep in touch with manufacturers to obtain the latest information.

Constant Power Discharge (Watts) at 25°C (77°F)


FV/Time	5min	10min	15min	20min	30min	45min	1hr	2hr	3hr	4hr	5hr	6hr	8hr	10hr	20hr
1.85 V	13.9	10.8	9.04	7.90	6.17	4.59	3.88	2.31	1.81	1.48	1.21	1.05	0.853	0.714	0.392
1.80 V	18.5	13.6	10.8	9.20	7.17	5.29	4.32	2.50	1.94	1.57	1.29	1.12	0.902	0.735	0.396
1.75 V	20.4	14.8	11.6	9.80	7.39	5.44	4.50	2.59	1.97	1.60	1.32	1.15	0.915	0.754	0.399
1.70 V	21.9	15.7	12.2	10.2	7.65	5.64	4.63	2.65	2.02	1.64	1.35	1.17	0.927	0.768	0.406
1.65 V	23.8	16.8	12.9	10.8	8.00	5.73	4.70	2.67	2.10	1.69	1.39	1.20	0.939	0.783	0.411
1.60 V	25.6	17.8	13.6	11.4	8.39	5.94	4.72	2.77	2.15	1.74	1.43	1.22	0.947	0.790	0.413

Disclaimer: Manufacturers have the right to self-modify the parameters of the product updates, please keep in touch with manufacturers to obtain the latest information.


Float Charging Characteristics

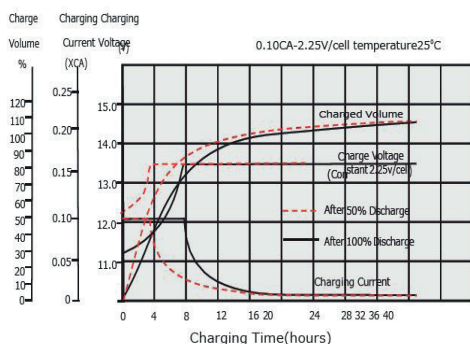


Discharge Characteristics

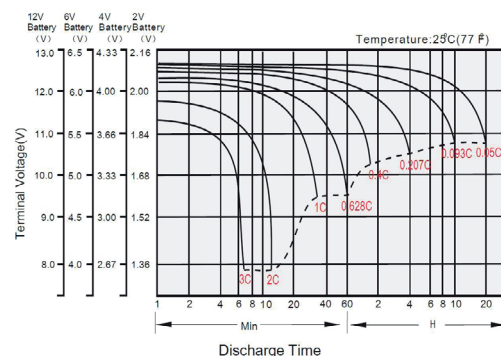


Temperature Effects in Relation to Battery Capacity

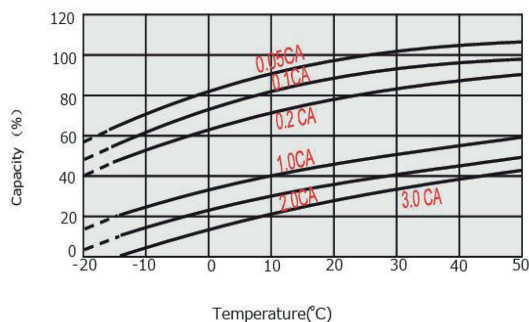

Effect of Temperature on Long Term Float Life

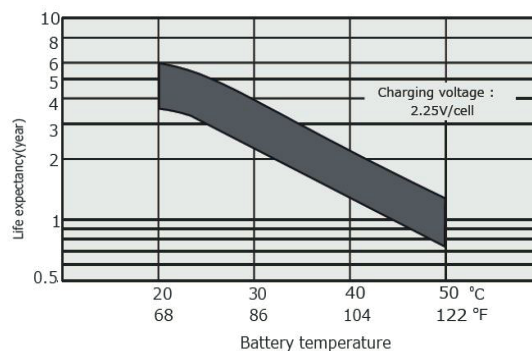

Cycle Life in Relation to Depth of Discharge

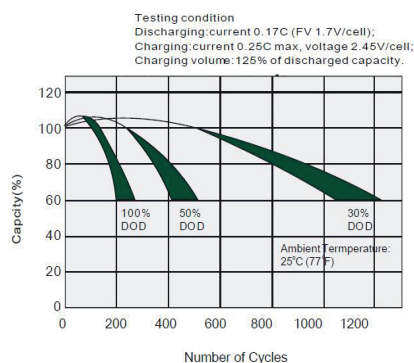

Self Discharge Characteristics

